

**1. CONDUCTOR:**

- 1.1 Size and Material: 14 19/.0147" AWG nickel-plated copper wire.
- 1.2 O.D.: .069" nom.

**2. INSULATION:**

- 2.1 Extruded PTFE.
- 2.2 Wall thickness: .020" nom.
- 2.3 O.D.: .109" ± .004"
- 2.4 Color: white.

**3. SEPARATOR:**

- 3.1 Spiral-wrapped .003" PTFE/glass tape with a 50% overlap.
- 3.2 Wall thickness: .006" nom.
- 3.3 O.D.: .121" ± .004"

**4. JACKET:**

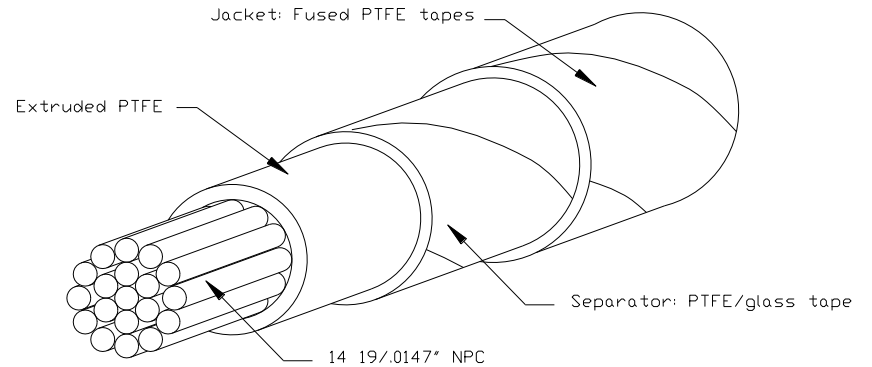
- 4.1 Spiral-wrapped and fused PTFE tapes.
- 4.2 Wall thickness: .009" nom.
- 4.3 Print on the jacket: "CE / (>R)U AWM 10487 HBR-F CSA I A/B 600V 250°C FT1 GE P/N 362A2370P015".
- 4.4 O.D.: .139" ± .004"
- 4.5 Color: black.




**5. PERFORMANCE:**

- 5.1 Voltage rating: 600 VAC R.M.S.
- 5.2 Temperature rating: 250°C

**6. REFERENCES:**

- 6.1 General Electric specification #362A2370.
- 6.2 UL Subject 758 (AWM), Style 10487.
- 6.3 CSA Standard C22.2 No.210 (AWM), Class I, Group A/B.
- 6.4 Low Voltage Directive (LVD) 73/23/EEC (EC).



Engineering Change Notice No.							 <p>This specification is the property of Harbour Industries Canada Limited and may not be used or copied without the express written permission of Harbour Industries Canada Limited.</p>	Done: <i>David H. ...</i>	 <p>1365, boul. Industriel, Farnham, Quebec, Canada, J2N 2X3 Phone: (450) 293-5304 Fax: (450) 293-2421 Web site: www.harbouritd.com</p>				
								Date: March 24, 2003					
								Verified: <i>David H. ...</i>	Description: <b>G.E. 362A2370P015</b>				
							Date: March 24, 2003						
<b>UNCONTROLLED DOCUMENT</b> A later revision of this specification may exist.							 <p>A member of The Marmon Group of companies</p>	Size: <b>A</b>	Scale: ---	Page: 1 of 1	Code Ident. No: <b>57104</b>	Specification No.: <b>F00143-S</b>	Rev. ---