


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
8/14/2012	B	E22318	P/N ADDED

Parent Number: FM6003-

Description: 35mm2 7X40/.39mm BC 3SBD ES-AU5T-1A348-AA Ford Global Spec FL2X-B

DIAMETER: 0.420
TOLERANCE ± : 0.015

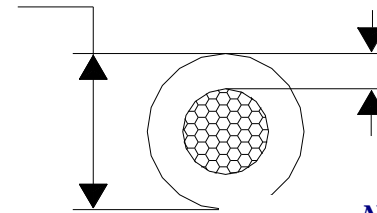

NOM WALL: 0.051
MINIMUM WALL: 0.041

Stranding: 7X40/.39mm BC LHL

Style: Ford: ES-AU5T-1A348-AA 3SBD; GM: GMW15626 FL2X-B

Insulation: XLPE

Print Legend: NO PRINT

Voltage: Nominal system voltage of 60 V rms or less in automotive electrical harnesses.

Temperature: 125C

Notes: 1. Separator is used between the copper conductor and insulation.

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

