


YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

Date:

Company:

"This is an uncontrolled document once printed"

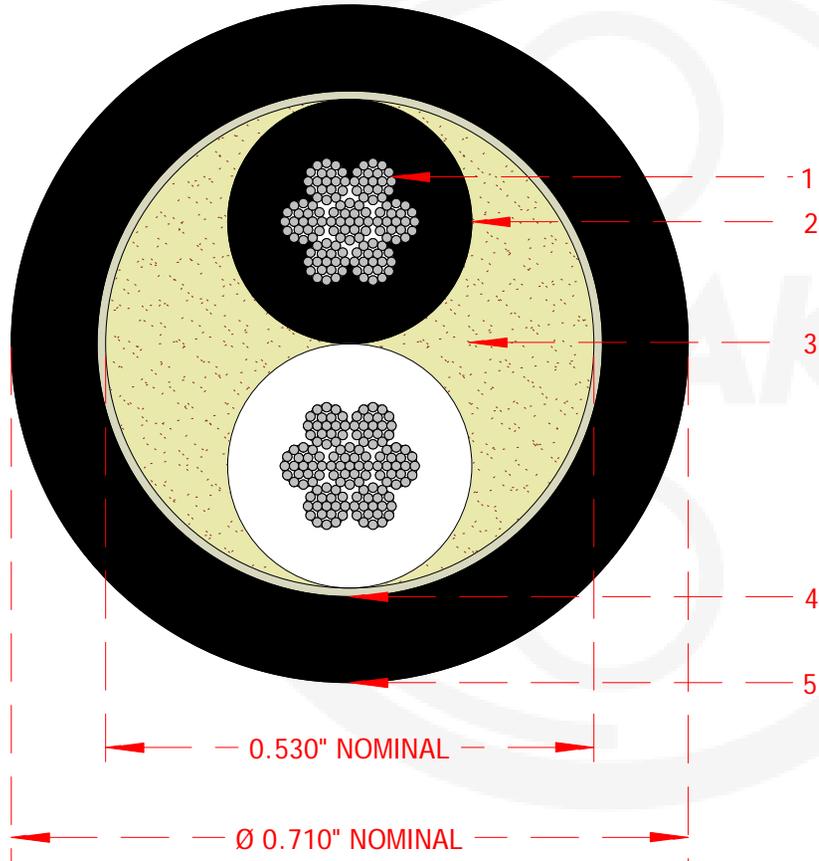

Components:

- 1 - #8 AWG (133/29) BC, Conductor, ASTM B-3, ASTM B-174
- 2 - Insulation, Thermoplastic Elastomer (TPE) 0.048" Nom. Wall, 0.265" Nom OD
Color Code: Black, White
- 3 - Polypropylene filler as needed to make a round cable
- 4 - Paper separator tape
- 5 - Outer Jacket, Thermoplastic Elastomer (TPE), 0.090 Nom Wall
Color: Black

Print Legend: CCA 8 AWG (8.36mm²) 2/C SEOWW 600V -50°C TO 105°C WATER RESISTANT SUN RES P-07-KA150018-MSHA MADE IN USA

Finished Cable:
Nominal Diameter: 0.710"
Total Weight: 265 lbs. /1000' Nominal

Rating, Insulation rated 600 Volts
Standards, Cable is rated for 600 Volts, -50 °C +105 °C
Other RoHS and REACH Compliant, Lead free
Meets all applicable sections of UL 62
NEC Article 400, Table 5(A)



8 AWG 2C SEOWW, NON UL, 600V, -50°C +105°C

All Dimensions are Shown In Inches

PROPRIETARY DOCUMENT

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

Third Angle Projection

Drawn By: RIR

Scale: 5 : 1

Cust. #: -

REV -

Reviewed By: -

Sheet: 1 of 1

Lake's #: SEOWW82(133ST)NUL

REV -

Cage Code: N/A

Date Created: 02/07/19

Revision	Description	Approved By	Date
-	-	-	-