

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company



HEYbrid™ Brass/Nylon Liquid Tight Cordgrips

Straight-Thru, PG and Metric Hubs

The Ultimate in Liquid Tight Strain Relief Protection

CABLE DIA. RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum		Maximum				A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Flat Size	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.



PG Hubs – Locknuts Not Included

.04	1,0	.20	5,0	4450	PG 7	.50	12,7	.87	22,0	.20	5,0	.59	15,0
.12	3,0	.28	7,0	4451									
.08	2,0	.24	6,0	4452	PG 9	.61	15,5	1.02	26,0	.24	6,0	.71	18,0
.18	4,5	.39	10,0	4453									
.14	3,5	.31	8,0	4454	PG 11	.75	19,0	1.22	31,0	.24	6,0	.87	22,0
.28	7,0	.51	13,0	4455									
.14	3,5	.31	8,0	4456	PG 13.5	.83	21,1	1.24	31,5	.26	6,5	.87	22,0
.28	7,0	.51	13,0	4457									
.14	3,5	.31	8,0	4458	PG 16	.91	23,1	1.24	31,5	.26	6,5	.94	24,0
.28	7,0	.51	13,0	4459									
.20	5,0	.43	11,0	4460	PG 16	.91	23,1	1.48	37,5	.26	6,5	1.10	28,0
.39	10,0	.67	17,0	4461									
.28	7,0	.59	15,0	4462	PG 21	1.14	29,0	1.57	40,0	.28	7,0	1.42	36,0
.51	13,0	.83	21,0	4463									
.59	15,0	.91	23,0	4464	PG 29	1.48	37,6	1.89	48,0	.31	8,0	1.81	46,0
.75	19,0	1.10	28,0	4465									

Metric Hubs – Locknuts Not Included

.04	1,0	.20	5,0	4472	M12 x 1,5	.50	12,5	1.14	29,0	.47	12,0	.59	15,0
.12	3,0	.28	7,0	4473									
.08	2,0	.24	6,0	4474	M16 x 1,5	.64	16,5	1.26	32,0	.47	12,0	.71	18,0
.18	4,5	.39	10,0	4475									
.14	3,5	.31	8,0	4476	M20 x 1,5	.80	20,5	1.46	37,0	.47	12,0	.87	22,0
.28	7,0	.51	13,0	4477									
.20	5,0	.43	11,0	4478	M25 x 1,5	1.00	25,4	1.69	43,0	.47	12,0	1.10	28,0
.39	10,0	.67	17,0	4479									
.28	7,0	.59	15,0	4480	M32 x 1,5	1.27	32,3	1.89	48,0	.59	15,0	1.42	36,0
.51	13,0	.83	21,0	4481									
.59	15,0	.91	23,0	4482	M40 x 1,5	1.59	40,5	2.17	55,0	.59	15,0	1.81	46,0
.75	19,0	1.10	28,0	4483									
.79	20,0	1.14	29,0	4484	M50 x 1,5	1.99	50,5	2.17	55,0	.59	15,0	2.17	55,0
.98	25,0	1.38	35,0	4485									
1.10	28,0	1.54	39,0	4486	M63 x 1,5	2.49	63,2	2.28	58,0	.59	15,0	2.76	70,0
1.38	35,0	1.89	48,0	4487									
1.73	44,0	2.17	55,0	4488	M63 x 1,5	2.49	63,2	2.28	58,0	.59	15,0	3.15	80,0

For PG Hub certifications, consult Heyco.

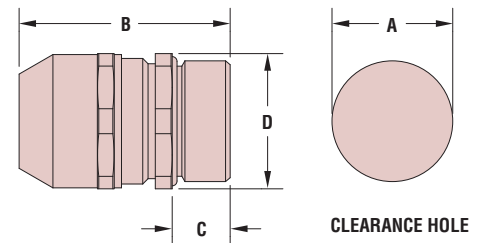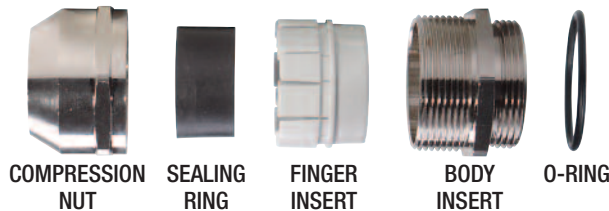

Material

Nickel-plated Brass w/polyamide PA 6 finger insert, TPE Sealing Gland and Buna-N O-ring

Certifications (Metric Hubs only)



Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements



VDE Approved

Temperature Range

-40°F (-40°C) to 212°F (100°C)

IP Rating

IP 68, IP 69K

Quick Specs