

RATINGS / APPROVALS

200°C – 600 Volts - UL Style 3512 / 3604 / CSA AWM I A/B FT2

200°C – 1,000 Volts - UL Style 3644 / CSA AWM I A/B FT2

CONSTRUCTION

Conductors

22 AWG – 4/0 AWG

Stranded tinned copper or nickel-plated copper
(Other conductor materials available)

Insulating System

Separator tape between conductor and silicone on sizes 10awg to 4/0 on UL Style 3644 only. (Not shown in illustration)

Composite Extruded Silicone Rubber with intermediate fiberglass reinforcement


Standard Color Coding

Available in Colors

CHARACTERISTICS

- Outperforms Braided Silicone products:
 - ~ Eliminates braid fraying, flowering and shrink back.
 - ~ Virtually eliminates skin irritation.
 - ~ Significantly Reduces airborne fiberglass contaminants traditionally found in high volume processing.
 - ~ Superior flexibility.
 - ~ Color stable at elevated temperatures.
 - ~ LSZH - Low Smoke Zero Halogen.
 - ~ Suitable for varnish dip and bake applications.
 - ~ Smaller OD
- Silicone formulations suitable for UV, ozone, moisture exposure.
Not suited for immersed applications.
- Suitable for applications to -60°C

150°C version with flexible stranded conductor is available. (consult factory)

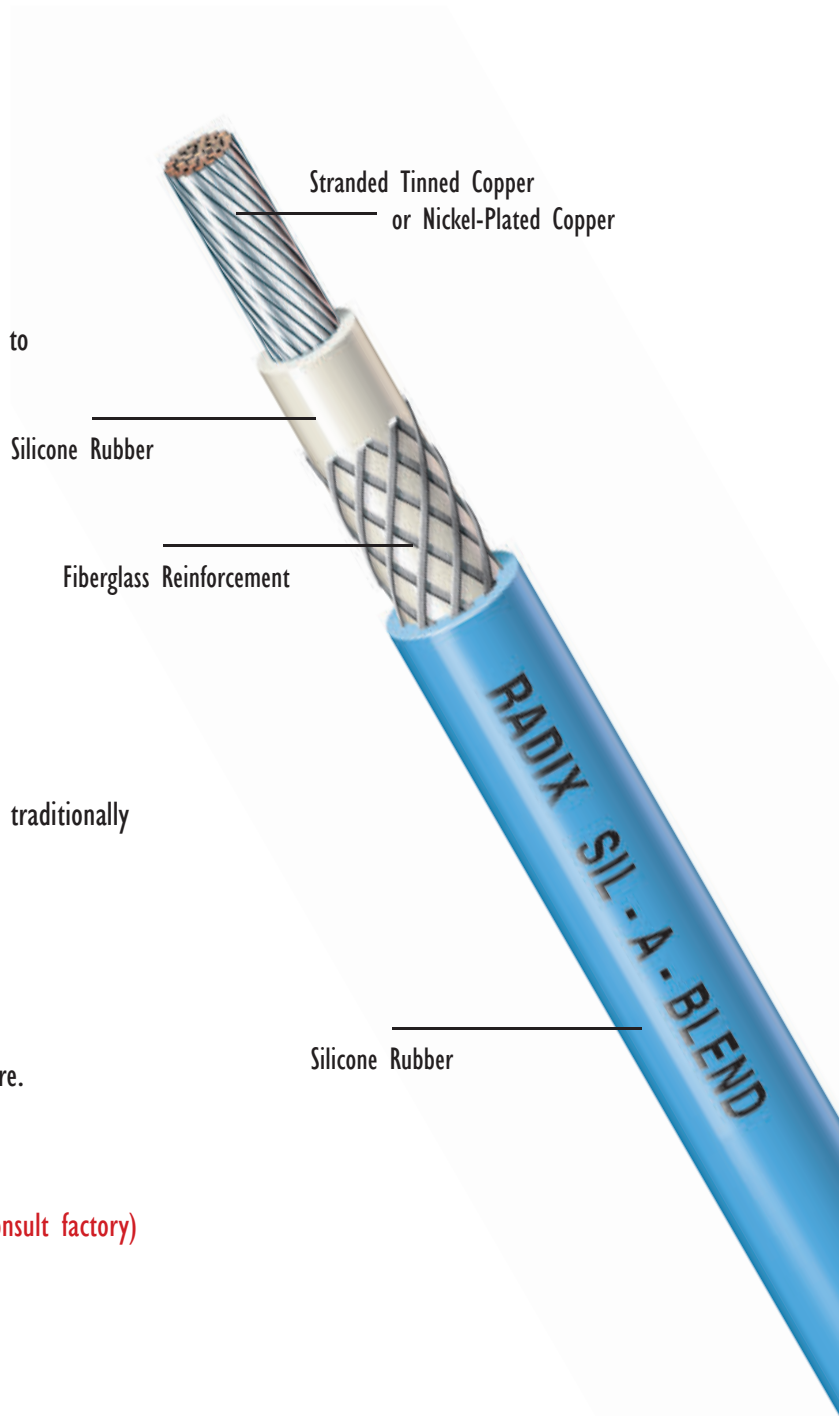

Radix[™]

SPECIFICATIONS

SIL-A-BLEND® 200 HIGH-TEMPERATURE LEAD WIRE

SIL-A-BLEND 200C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft.	Wgt - kg per km	UL	CSA
NBA22P007	22	7	0.100	2.54	6.61	9.83	3512/3604	AWM I A/B FT2
NBA20P007	20	7	0.110	2.79	8.36	12.44	3512/3604	AWM I A/B FT2
NBA18T007	18	7	0.121	3.07	11.34	16.87	3512/3604	AWM I A/B FT2
NBA16T007	16	7	0.134	3.40	14.38	21.40	3512/3604	AWM I A/B FT2
NBA14T007	14	7	0.140	3.55	19.75	29.39	3512/3604	AWM I A/B FT2
NBA12T019	12	19	0.166	4.22	28.52	42.44	3512/3604	AWM I A/B FT2
NBA10T019	10	19	0.215	5.46	47.30	70.39	3512/3604	AWM I A/B FT2
NBA08T061	8	61	0.254	6.45	72.95	108.56	3512/3604	AWM I A/B FT2
NBA06T084	6	84	0.347	8.81	118.18	175.87	3512/3604	AWM I A/B FT2
NBA04T133	4	133	0.381	9.67	161.70	240.64	3512/3604	AWM I A/B FT2
NBA02T259	2	259	0.446	11.33	239.70	356.70	3512/3604	AWM I A/B FT2
NBA01T259	1	259	0.521	13.23	310.44	462.00	3512/3604	AWM I A/B FT2
NCAX1T259	1/0	259	0.576	14.63	391.31	582.33	3604	AWM I A/B FT2
NCAX2T259	2/0	259	0.622	15.80	482.18	717.56	3604	AWM I A/B FT2
NCAX3T259	3/0	259	0.671	17.04	590.86	879.30	3604	AWM I A/B FT2
NCAX4T259	4/0	259	0.731	18.57	730.23	1086.70	3604	AWM I A/B FT2

SIL-A-BLEND 200C/1000V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft.	Wgt - kg per km	UL	CSA
NGA18T007	18	7	0.121	3.07	11.34	16.87	3644	AWM I A/B FT2
NGA16T007	16	7	0.134	3.40	14.38	21.40	3644	AWM I A/B FT2
NGA14T007	14	7	0.140	3.55	19.75	29.39	3644	AWM I A/B FT2
NGA12T019	12	19	0.166	4.22	28.52	42.44	3644	AWM I A/B FT2
NGA10T019	10	19	0.215	5.46	47.30	70.39	3644	AWM I A/B FT2
NGA08T061	8	61	0.254	6.45	72.95	108.56	3644	AWM I A/B FT2
NGA06T084	6	84	0.347	8.81	118.18	175.87	3644	AWM I A/B FT2
NGA04T133	4	133	0.381	9.67	161.70	240.64	3644	AWM I A/B FT2
NGA02T259	2	259	0.446	11.33	239.70	356.70	3644	AWM I A/B FT2
NGA01T259	1	259	0.521	13.23	310.44	462.00	3644	AWM I A/B FT2
NGAX1T259	1/0	259	0.576	14.63	391.31	582.33	3644	AWM I A/B FT2
NGAX2T259	2/0	259	0.622	15.80	480.18	714.59	3644	AWM I A/B FT2
NGAX3T259	3/0	259	0.671	17.04	590.85	879.28	3644	AWM I A/B FT2
NGAX4T259	4/0	259	0.731	18.57	730.23	1086.70	3644	AWM I A/B FT2

Standard conductor: Tinned Copper (Standard conductor for 20-22 AWG ONLY: Nickel Plated Copper-2%)
Consult factory for alternate conductor and stranding options.

©Registered trademark of Radix.

All dimensions listed above are nominal.

Compliance: UL Listed File No. E22244 • CSA Certified File No. LL13427 or LL80670

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire is not responsible for any claim traceable to such error.



Radix Wire
26000 Lakeland Boulevard • Cleveland, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com