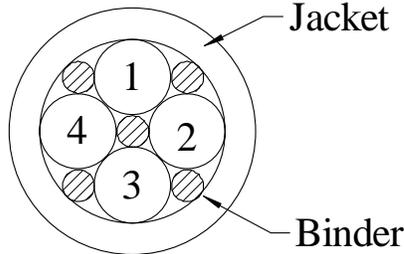


**Description:** Four Conductor, 14 AWG,  
 Tray Cable With Overall PVC Jacket

**Date:** 5/15/2008

**JM Part Number:** JM55447

**Reference:** TC1404/PP-0-JM

**Cable Diagram**

**Components**

Four 14 AWG Singles

Conductor: 14 AWG, 19/.0147 bare copper

Insulation: .016" wall of PVC (See Color Code)

Nylon Jacket: .005" wall of Clear Nylon .116"

**Cable Construction**

Cabling: Four conductors cabled together (LHL), with fillers as necessary

Mylar: Clear Mylar tape

Jacket: .047" nominal wall of Black PVC .378"

**Print**
**E73202 4/C 14 AWG 600V TYPE TC (UL) 90C DRY 75C WET SUN RES DIR BUR**  
**- - - LL41103 CSA AWM I/II A/B 90C 600V FT1**
**Color Code**

1. Black and numerically printed: 1 - ONE
2. White and numerically printed: 2 - TWO
3. Red and numerically printed: 3 - THREE
4. Green and numerically printed: 4 - FOUR

**Requirements**

 Temperature: 90°C  
 Voltage: 600V

Approvals: UL Type TC

Written By:	rjc	5/15/2008	Rev. 0	Initial Issue
Revised By:				
Revised By:				
Revised By:				