


Super Vu-Tron® Multi-Conductor Type W Round

90°C (UL), Type W, 2000 Volt Portable Power Cable

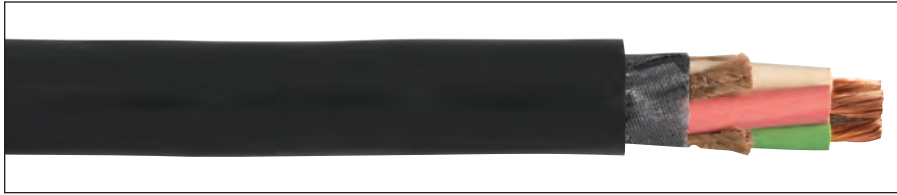

Product Construction:

Conductor:

- 8 AWG through 500 kcmil fully annealed stranded bare copper

Insulation:

- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below

Jacket:

- Super Vu-Tron® 90°C, black
- Temperature range: -40°C to +90°C

Jacket Marking:

- SIZES SMALLER THAN 2-1/4" – CAROL SUPER VU-TRON® (SIZE) TYPE W PORTABLE POWER CABLE (UL) 2000 V DRY 90°C WET 75°C SUN RES P-7K-123049-MSHA---CSA TYPE W (-40°C) 2 KV FT5 MADE IN USA (TRU-MARK SEQUENTIAL FOOTAGE)
- SIZES 2-1/4" AND LARGER – (SIZE) TYPE W CAROL SUPER VU-TRON® 90°C DRY AND WATER RESISTANT 75°C 2000 V SUN RES (UL) P-7K-123049 MSHA LR27161 MADE IN USA (TRU-MARK SEQUENTIAL FOOTAGE)

Applications:

- Industrial and light- to medium-duty mining applications
- Heavy-duty service as power supply cable
- AC systems (grounded and ungrounded)
- Mobile and portable electrical equipment
- Motor and battery leads
- 2-conductor cables—use on DC or AC single-phase systems where grounding is not required
- 3-conductor cables—use on AC systems where no grounding is required or on DC systems with one conductor for grounding
- 4-conductor cables—use on two- or three-phase AC systems with one conductor used for grounding
- 5-conductor cables—use in applications where separating the system neutral from the frame ground is required

Features:

- Withstands severe environmental conditions
- Suitable for immersion in water*
- Indent-printed for easy identification
- Withstands exposure to oil, acids, alkalies, heat, moisture and most chemicals
- Rope lay stranding for maximum flex life
- Excellent impact resistance
- Cable core bound for superior flexibility and toughness
- Sunlight-resistant
- TRU-Mark® sequential footage marking

Industry Approvals:

- CSA
- MSHA Approved
- UL Type W
- RoHS Compliant

Packaging:

- Lengths cut to order

* Suitable for immersion in water if properly sealed and terminated.

COLOR CODE CHART

NO. OF CONDUCTORS	COLOR**
2	Black, White
3	Black, White, Green
4	Black, White, Red, Green
5	Black, White, Red, Green, Orange

CATALOG NUMBER	NO. OF COND.	AWG OR kcmil	COND. STRAND	NOMINAL COND. O.D.		NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS ⁽¹⁾	APPROX. NET WT. LBS/M ⁽⁶⁾
				INCHES	mm	INCHES	mm	INCHES	mm		
2 CONDUCTOR – TYPE W – 2000 VOLT											
81312	2	8	133	0.160	4.06	0.060	1.52	0.770	19.56	74	325
81622	2	6	259	0.198	5.03	0.060	1.52	0.910	23.11	99	470
81642	2	4	259	0.245	6.22	0.060	1.52	1.020	25.91	130	620
81662	2	2	259	0.297	7.54	0.080	2.03	1.210	30.73	174	935
81372*	2	1	259	0.353	8.97	0.080	2.03	1.370	34.80	202	1305
81382*	2	1/0	259	0.385	9.78	0.080	2.03	1.435	36.45	234	1555
81392*	2	2/0	259	0.442	11.23	0.080	2.03	1.555	39.50	271	1860
81402*	2	3/0	259	0.480	12.19	0.080	2.03	1.670	42.42	313	2230
81412*	2	4/0	259	0.555	14.10	0.080	2.03	1.815	46.10	361	2655
3 CONDUCTOR – TYPE W – 2000 VOLT											
81313	3	8	133	0.160	4.06	0.060	1.52	0.925	23.50	74	470
81623	3	6	259	0.198	5.03	0.060	1.52	0.995	25.27	99	625
81643	3	4	259	0.245	6.22	0.060	1.52	1.095	27.81	130	810
81663	3	2	259	0.297	7.54	0.080	2.03	1.285	32.64	174	1190
81373*	3	1	259	0.353	8.97	0.080	2.03	1.445	36.70	202	1655
81383	3	1/0	259	0.385	9.78	0.080	2.03	1.555	39.50	234	1965
81393	3	2/0	259	0.442	11.23	0.080	2.03	1.670	42.42	271	2350
81403*	3	3/0	259	0.480	12.19	0.080	2.03	1.815	46.10	313	2890
81413*	3	4/0	259	0.555	14.10	0.080	2.03	1.930	49.02	361	3285
81423*	3	250	627	0.615	15.62	0.095	2.41	2.390	60.71	402	5070
81443*	3	350	855	0.725	18.42	0.095	2.41	2.680	68.07	495	6570
81473*	3	500	1235	0.880	22.35	0.095	2.41	3.030	76.96	613	8700
4 CONDUCTOR – TYPE W – 2000 VOLT											
81314	4	8	133	0.160	4.06	0.060	1.52	0.980	24.89	65	615
81624	4	6	259	0.198	5.03	0.060	1.52	1.070	27.18	87	800
81644	4	4	259	0.245	6.22	0.060	1.52	1.210	30.73	114	1040
81664	4	2	259	0.297	7.54	0.080	2.03	1.435	36.45	152	1580
81374	4	1	259	0.353	8.97	0.080	2.03	1.595	40.51	177	2045
81384	4	1/0	259	0.385	9.78	0.080	2.03	1.705	43.31	205	2430
81394	4	2/0	259	0.442	11.23	0.080	2.03	1.845	46.86	237	2950
81404	4	3/0	259	0.480	12.19	0.080	2.03	1.965	49.91	274	3430
81414	4	4/0	259	0.555	14.10	0.080	2.03	2.145	54.48	316	3885
5 CONDUCTOR – TYPE W – 2000 VOLT											
81315	5	8	133	0.160	4.06	0.060	1.52	1.030	26.16	52	650
81625	5	6	259	0.198	5.03	0.060	1.52	1.170	29.72	69	915
81645	5	4	259	0.245	6.22	0.060	1.52	1.360	34.54	91	1320
81665	5	2	259	0.297	7.54	0.080	2.03	1.595	40.51	121	1925
81375*	5	1	259	0.353	8.97	0.080	2.03	1.820	46.23	141	2675
81385	5	1/0	259	0.385	9.78	0.080	2.03	1.900	48.26	164	2885
81395*	5	2/0	259	0.442	11.23	0.080	2.03	2.060	52.32	189	3630
81405*	5	3/0	259	0.480	12.19	0.080	2.03	2.260	57.40	219	4900
81415*	5	4/0	259	0.555	14.10	0.080	2.03	2.460	62.48	252	5980

⁽¹⁾ Ampacities based on 90°C conductor and 30°C ambient temperature per Table 400.5(A)(2) of the National Electrical Code®.

* Non-stock item; minimum quantity purchase required.

** Green conductor for grounding only.

⁽⁶⁾ Actual shipping weight may vary.

